



<http://algs4.cs.princeton.edu>

2.3 QUICKSORT

- ▶ *quicksort*
- ▶ *selection*
- ▶ *duplicate keys*
- ▶ *system sorts*

Two classic sorting algorithms: mergesort and quicksort

Critical components in the world's computational infrastructure.

- Full scientific understanding of their properties has enabled us to develop them into practical system sorts.
- Quicksort honored as one of top 10 algorithms of 20th century in science and engineering.


Mergesort. [last lecture]



Quicksort. [this lecture]



Quicksort t-shirt

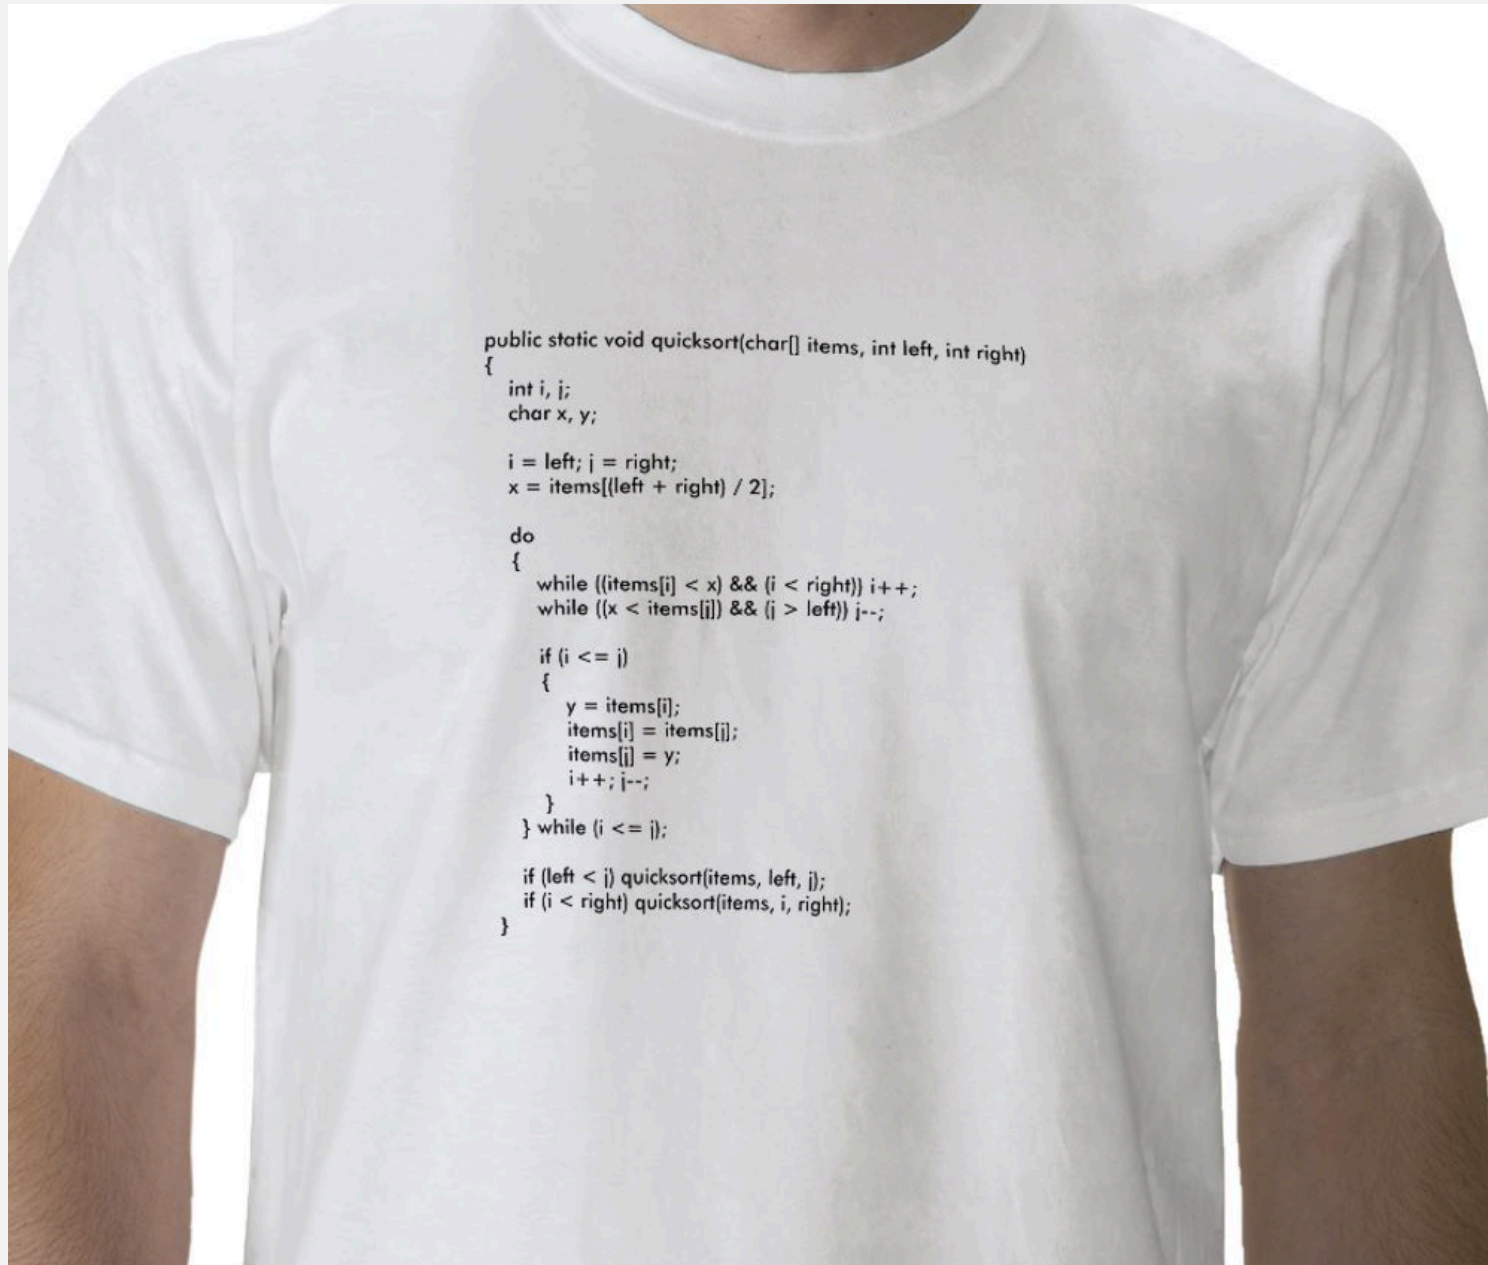

```
public static void quicksort(char[] items, int left, int right)
{
    int i, j;
    char x, y;

    i = left; j = right;
    x = items[(left + right) / 2];

    do
    {
        while ((items[i] < x) && (i < right)) i++;
        while ((x < items[j]) && (j > left)) j--;

        if (i <= j)
        {
            y = items[i];
            items[i] = items[j];
            items[j] = y;
            i++; j--;
        }
    } while (i <= j);

    if (left < j) quicksort(items, left, j);
    if (i < right) quicksort(items, i, right);
}
```



<http://algs4.cs.princeton.edu>

2.3 QUICKSORT

- ▶ *quicksort*
- ▶ *selection*
- ▶ *duplicate keys*
- ▶ *system sorts*

Quicksort

Basic plan.

- **Shuffle** the array.
- **Partition** so that, for some j
 - entry $a[j]$ is in place
 - no larger entry to the left of j
 - no smaller entry to the right of j
- **Sort** each subarray recursively.



input	Q	U	I	C	K	S	O	R	T	E	X	A	M	P	L	E
shuffle	K	R	A	T	E	L	E	P	U	I	M	Q	C	X	O	S
partition	E	C	A	I	E	K	L	P	U	T	M	Q	R	X	O	S
sort left	A	C	E	E	I	K	L	P	U	T	M	Q	R	X	O	S
sort right	A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X
result	A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X

Diagram illustrating the partitioning step of Quicksort. The partitioning item is 'K'. Elements less than or equal to 'K' (E, C, A, I, E) are moved to the left, and elements greater than 'K' (L, P, U, T, M, Q, R, X, O, S) are moved to the right. The final result is the sorted array: A C E E I K L M O P Q R S T U X.

Tony Hoare

- Invented quicksort to translate Russian into English.
- [but couldn't explain his algorithm or implement it!]
- Learned Algol 60 (and recursion).
- Implemented quicksort.



Tony Hoare
1980 Turing Award



ALGORITHM 64
QUICKSORT
C. A. R. HOARE
Elliott Brothers Ltd., Borehamwood, Hertfordshire, Eng.

```
procedure quicksort (A,M,N); value M,N;  
    array A; integer M,N;  
comment Quicksort is a very fast and convenient method of  
sorting an array in the random-access store of a computer. The  
entire contents of the store may be sorted, since no extra space is  
required. The average number of comparisons made is  $2(M-N) \ln$   
 $(N-M)$ , and the average number of exchanges is one sixth this  
amount. Suitable refinements of this method will be desirable for  
its implementation on any actual computer;  
begin    integer I,J;  
        if M < N then begin partition (A,M,N,I,J);  
            quicksort (A,M,J);  
            quicksort (A, I, N)  
        end  
end    quicksort
```

Communications of the ACM (July 1961)

Tony Hoare

- Invented quicksort to translate Russian into English.
 - [but couldn't explain his algorithm or implement it!]
- Learned Algol 60 (and recursion).
- Implemented quicksort.



Tony Hoare
1980 Turing Award

“ There are two ways of constructing a software design: One way is to make it so simple that there are obviously no deficiencies, and the other way is to make it so complicated that there are no obvious deficiencies. The first method is far more difficult. ”

“ I call it my billion-dollar mistake. It was the invention of the null reference in 1965... This has led to innumerable errors, vulnerabilities, and system crashes, which have probably caused a billion dollars of pain and damage in the last forty years. ”

Bob Sedgewick

- Refined and popularized quicksort.
- Analyzed quicksort.



Bob Sedgewick

Programming
Techniques

S. L. Graham, R. L. Rivest
Editors

Implementing Quicksort Programs

Robert Sedgewick
Brown University

This paper is a practical study of how to implement the Quicksort sorting algorithm and its best variants on real computers, including how to apply various code optimization techniques. A detailed implementation combining the most effective improvements to Quicksort is given, along with a discussion of how to implement it in assembly language. Analytic results describing the performance of the programs are summarized. A variety of special situations are considered from a practical standpoint to illustrate Quicksort's wide applicability as an internal sorting method which requires negligible extra storage.

Key Words and Phrases: Quicksort, analysis of algorithms, code optimization, sorting

CR Categories: 4.0, 4.6, 5.25, 5.31, 5.5

Acta Informatica 7, 327—355 (1977)
© by Springer-Verlag 1977

The Analysis of Quicksort Programs*

Robert Sedgewick


Received January 19, 1976

Summary. The Quicksort sorting algorithm and its best variants are presented and analyzed. Results are derived which make it possible to obtain exact formulas describing the total expected running time of particular implementations on real computers of Quicksort and an improvement called the median-of-three modification. Detailed analysis of the effect of an implementation technique called loop unwrapping is presented. The paper is intended not only to present results of direct practical utility, but also to illustrate the intriguing mathematics which arises in the complete analysis of this important algorithm.

Quicksort partitioning demo

Repeat until i and j pointers cross.

- Scan i from left to right so long as $(a[i] < a[lo])$.
- Scan j from right to left so long as $(a[j] > a[lo])$.
- Exchange $a[i]$ with $a[j]$.

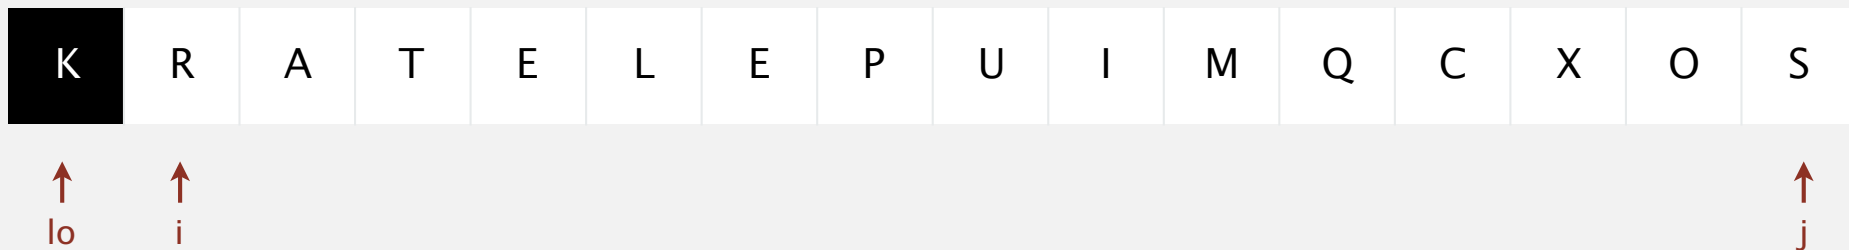


Quicksort partitioning demo

Repeat until i and j pointers cross.

- Scan i from left to right so long as $(a[i] < a[lo])$.
- Scan j from right to left so long as $(a[j] > a[lo])$.
- Exchange $a[i]$ with $a[j]$.

When pointers cross.

- Exchange $a[lo]$ with $a[j]$.

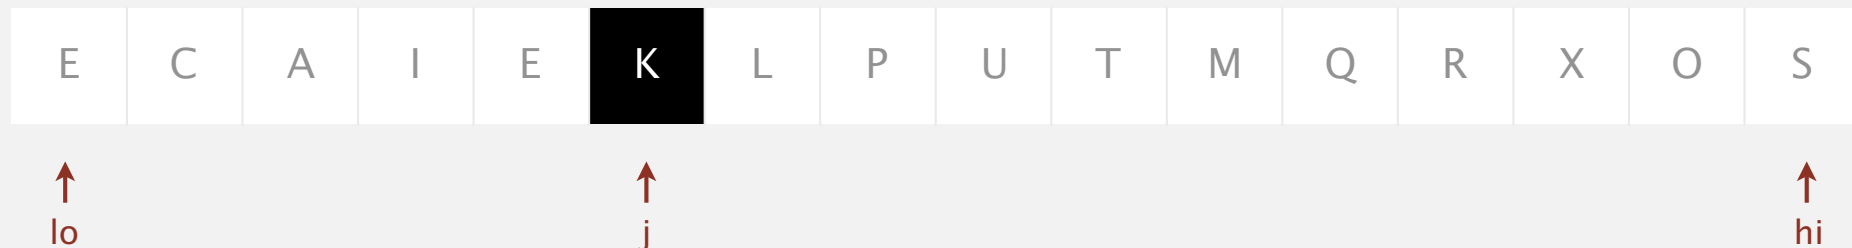

partitioned!



Quicksort: Java code for partitioning

```
private static int partition(Comparable[] a, int lo, int hi)
{
    int i = lo, j = hi+1;
    while (true)
    {
        while (less(a[++i], a[lo]))
            if (i == hi) break;
            find item on left to swap

        while (less(a[lo], a[--j]))
            if (j == lo) break;
            find item on right to swap

        if (i >= j) break;
        exch(a, i, j);
        check if pointers cross
        swap
    }

    exch(a, lo, j);
    swap with partitioning item
    return j;
    return index of item now known to be in place
}
```



Quicksort: Java implementation

```
public class Quick
{
    private static int partition(Comparable[] a, int lo, int hi)
    { /* see previous slide */ }

    public static void sort(Comparable[] a)
    {
        StdRandom.shuffle(a);
        sort(a, 0, a.length - 1);
    }

    private static void sort(Comparable[] a, int lo, int hi)
    {
        if (hi <= lo) return;
        int j = partition(a, lo, hi);
        sort(a, lo, j-1);
        sort(a, j+1, hi);
    }
}
```

← shuffle needed for
performance guarantee
(stay tuned)

Quicksort trace


	lo	j	hi	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
initial values				Q	U	I	C	K	S	O	R	T	E	X	A	M	P	L	E
random shuffle				K	R	A	T	E	L	E	P	U	I	M	Q	C	X	O	S
	0	5	15	E	C	A	I	E	K	L	P	U	T	M	Q	R	X	O	S
	0	3	4	E	C	A	E	I	K	L	P	U	T	M	Q	R	X	O	S
	0	2	2	A	C	E	E	I	K	L	P	U	T	M	Q	R	X	O	S
	0	0	1	A	C	E	E	I	K	L	P	U	T	M	Q	R	X	O	S
	1		1	A	C	E	E	I	K	L	P	U	T	M	Q	R	X	O	S
	4		4	A	C	E	E	I	K	L	P	U	T	M	Q	R	X	O	S
	6	6	15	A	C	E	E	I	K	L	P	U	T	M	Q	R	X	O	S
	7	9	15	A	C	E	E	I	K	L	M	O	P	T	Q	R	X	U	S
	7	7	8	A	C	E	E	I	K	L	M	O	P	T	Q	R	X	U	S
	8		8	A	C	E	E	I	K	L	M	O	P	T	Q	R	X	U	S
	10	13	15	A	C	E	E	I	K	L	M	O	P	S	Q	R	T	U	X
	10	12	12	A	C	E	E	I	K	L	M	O	P	R	Q	S	T	U	X
	10	11	11	A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X
	10		10	A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X
	14	14	15	A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X
	15		15	A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X
result				A	C	E	E	I	K	L	M	O	P	Q	R	S	T	U	X

*no partition
for subarrays
of size 1*

Quicksort trace (array contents after each partition)

Quicksort animation

50 random items

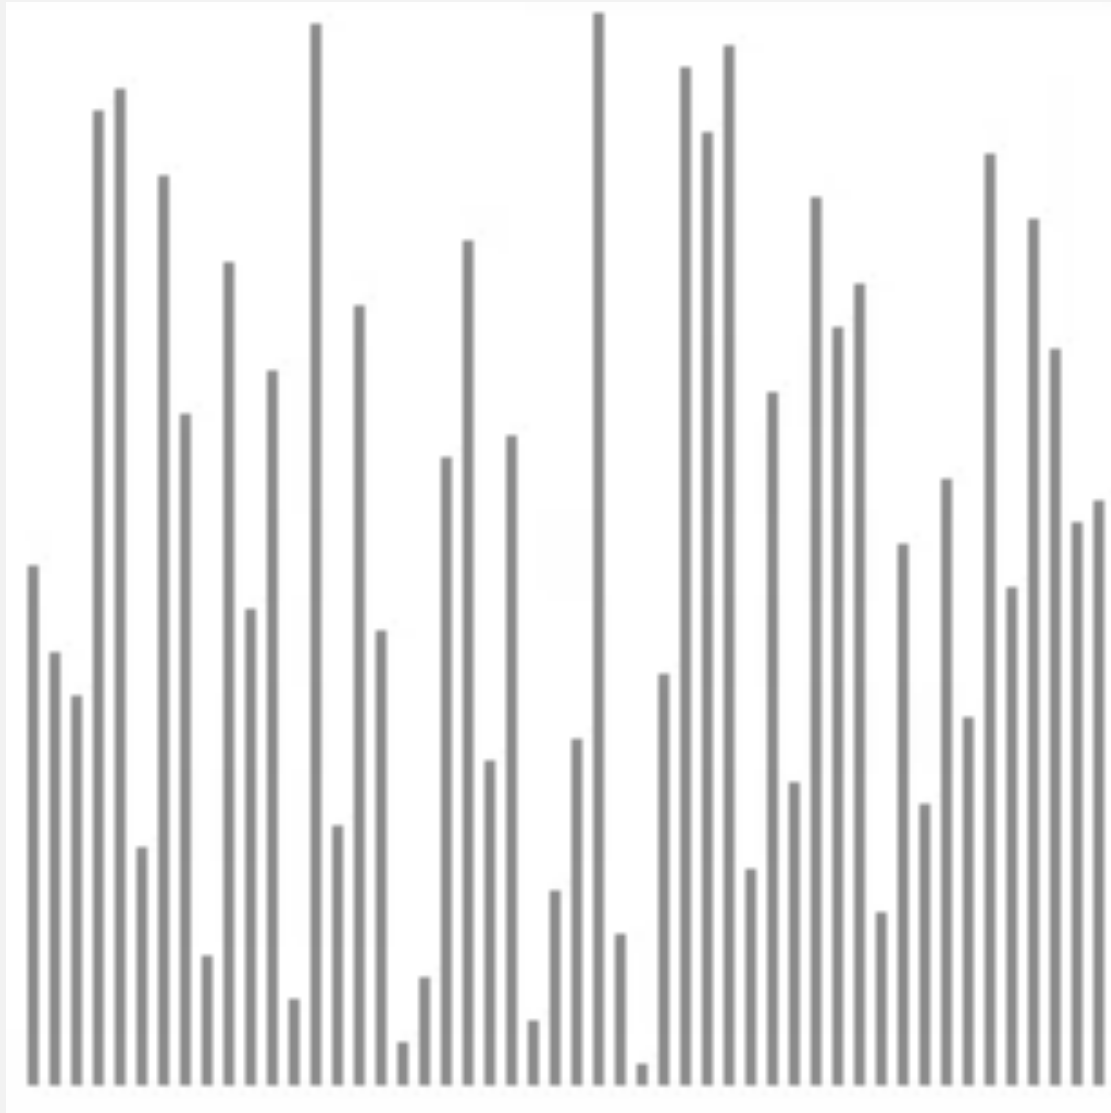

<http://www.sorting-algorithms.com/quick-sort>

- ▲ algorithm position
- █ in order
- █ current subarray
- █ not in order

Quicksort: implementation details

Partitioning in-place. Using an extra array makes partitioning easier (and stable), but is not worth the cost.

Terminating the loop. Testing whether the pointers cross is trickier than it might seem.

Equal keys. When duplicates are present, it is (counter-intuitively) better to stop scans on keys equal to the partitioning item's key.

Preserving randomness. Shuffling is needed for performance guarantee.

Equivalent alternative. Pick a random partitioning item in each subarray.

Quicksort: empirical analysis (1961)

Running time estimates:

- Algol 60 implementation.
- National-Elliott 405 computer.

Table 1

NUMBER OF ITEMS	MERGE SORT	QUICKSORT
500	2 min 8 sec	1 min 21 sec
1,000	4 min 48 sec	3 min 8 sec
1,500	8 min 15 sec*	5 min 6 sec
2,000	11 min 0 sec*	6 min 47 sec

* These figures were computed by formula, since they cannot be achieved on the 405 owing to limited store size.

sorting N 6-word items with 1-word keys



**Elliott 405 magnetic disc
(16K words)**

Quicksort: empirical analysis

Running time estimates:

- Home PC executes 10^8 compares/second.
- Supercomputer executes 10^{12} compares/second.

	insertion sort (N^2)			mergesort ($N \log N$)			quicksort ($N \log N$)		
computer	thousand	million	billion	thousand	million	billion	thousand	million	billion
home	instant	2.8 hours	317 years	instant	1 second	18 min	instant	0.6 sec	12 min
super	instant	1 second	1 week	instant	instant	instant	instant	instant	instant

Lesson 1. Good algorithms are better than supercomputers.

Lesson 2. Great algorithms are better than good ones.

Quicksort: best-case analysis

Best case. Number of compares is $\sim N \lg N$.

			a[]														
lo	j	hi	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
initial values			H	A	C	B	F	E	G	D	L	I	K	J	N	M	O
random shuffle			H	A	C	B	F	E	G	D	L	I	K	J	N	M	O
0	7	14	D	A	C	B	F	E	G	H	L	I	K	J	N	M	O
0	3	6	B	A	C	D	F	E	G	H	L	I	K	J	N	M	O
0	1	2	A	B	C	D	F	E	G	H	L	I	K	J	N	M	O
0		0	A	B	C	D	F	E	G	H	L	I	K	J	N	M	O
2		2	A	B	C	D	F	E	G	H	L	I	K	J	N	M	O
4	5	6	A	B	C	D	E	F	G	H	L	I	K	J	N	M	O
4		4	A	B	C	D	E	F	G	H	L	I	K	J	N	M	O
6		6	A	B	C	D	E	F	G	H	L	I	K	J	N	M	O
8	11	14	A	B	C	D	E	F	G	H	J	I	K	L	N	M	O
8	9	10	A	B	C	D	E	F	G	H	I	J	K	L	N	M	O
8		8	A	B	C	D	E	F	G	H	I	J	K	L	N	M	O
10		10	A	B	C	D	E	F	G	H	I	J	K	L	N	M	O
12	13	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
12		12	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
14		14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O

Quicksort: worst-case analysis

Worst case. Number of compares is $\sim \frac{1}{2} N^2$.

			a[]														
lo	j	hi	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
initial values			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
random shuffle			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
0	0	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
1	1	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
2	2	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
3	3	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
4	4	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
5	5	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
6	6	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
7	7	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
8	8	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
9	9	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
10	10	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
11	11	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
12	12	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
13	13	14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
14		14	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O

Quicksort: average-case analysis

Proposition. The average number of compares C_N to quicksort an array of N distinct keys is $\sim 2N \ln N$ (and the number of exchanges is $\sim \frac{1}{3} N \ln N$).

Pf. C_N satisfies the recurrence $C_0 = C_1 = 0$ and for $N \geq 2$:

$$C_N = \overset{\text{partitioning}}{\downarrow} (N+1) + \left(\frac{C_0 + C_{N-1}}{N} \right) + \left(\overset{\text{left}}{\downarrow} \frac{C_1 + C_{N-2}}{N} \right) + \dots + \left(\frac{C_{N-1} + C_0}{N} \right)$$

- Multiply both sides by N and collect terms: partitioning probability

$$NC_N = N(N+1) + 2(C_0 + C_1 + \dots + C_{N-1})$$

- Subtract from this equation the same equation for $N-1$:

$$NC_N - (N-1)C_{N-1} = 2N + 2C_{N-1}$$

- Rearrange terms and divide by $N(N+1)$:

$$\frac{C_N}{N+1} = \frac{C_{N-1}}{N} + \frac{2}{N+1}$$

Quicksort: average-case analysis


- Repeatedly apply above equation:

$$\begin{aligned}\frac{C_N}{N+1} &= \frac{C_{N-1}}{N} + \frac{2}{N+1} \\ &= \frac{C_{N-2}}{N-1} + \frac{2}{N} + \frac{2}{N+1} \quad \leftarrow \text{substitute previous equation} \\ &= \frac{C_{N-3}}{N-2} + \frac{2}{N-1} + \frac{2}{N} + \frac{2}{N+1} \\ &= \frac{2}{3} + \frac{2}{4} + \frac{2}{5} + \dots + \frac{2}{N+1}\end{aligned}$$

previous equation

- Approximate sum by an integral:

$$\begin{aligned}C_N &= 2(N+1) \left(\frac{1}{3} + \frac{1}{4} + \frac{1}{5} + \dots + \frac{1}{N+1} \right) \\ &\sim 2(N+1) \int_3^{N+1} \frac{1}{x} dx\end{aligned}$$

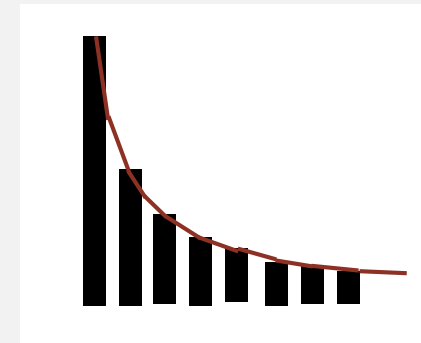

- Finally, the desired result:

$$C_N \sim 2(N+1) \ln N \approx 1.39N \lg N$$


Quicksort: average-case analysis

Proposition. The average number of compares C_N to quicksort an array of N distinct keys is $\sim 2N \ln N$ (and the number of exchanges is $\sim \frac{1}{3} N \ln N$).

Pf 2. Consider BST representation of keys 1 to N .

shuffle

9	10	2	5	8	7	6	1	11	12	13	3	4
---	----	---	---	---	---	---	---	----	----	----	---	---

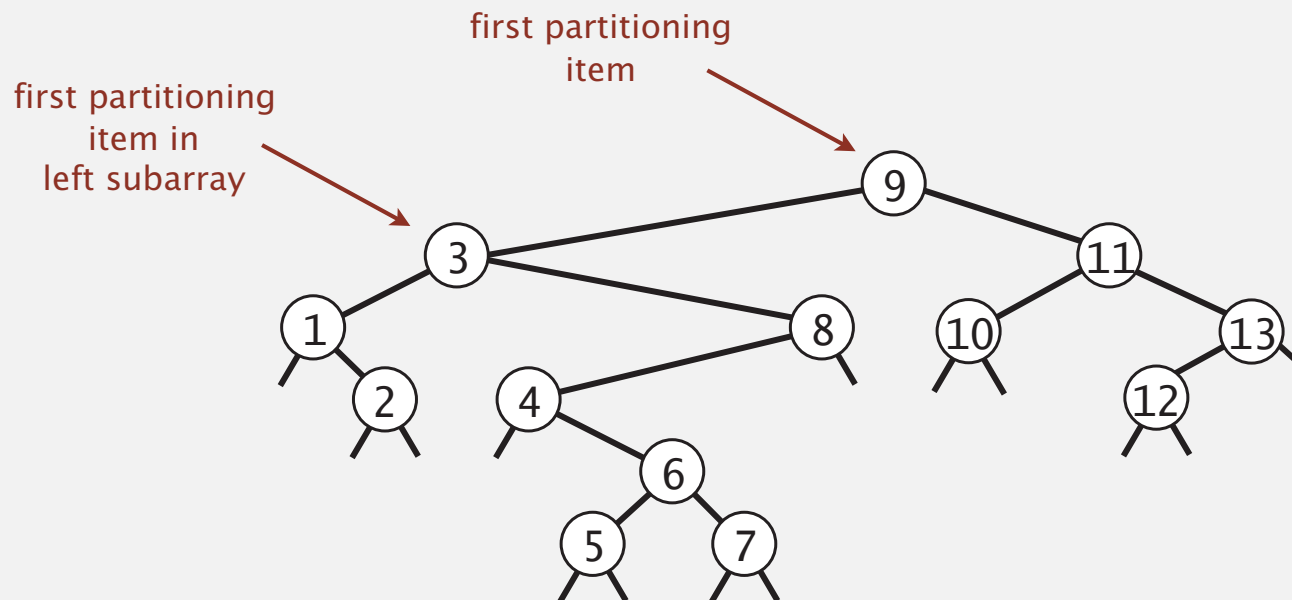

Quicksort: average-case analysis


Proposition. The average number of compares C_N to quicksort an array of N distinct keys is $\sim 2N \ln N$ (and the number of exchanges is $\sim \frac{1}{3} N \ln N$).

Pf 2. Consider BST representation of keys 1 to N .

- A key is compared only with its ancestors and descendants.
- Probability i and j are compared equals $2 / |j - i + 1|$.

3 and 6 are compared
(when 3 is partition)

1 and 6 are not compared
(because 3 is partition)

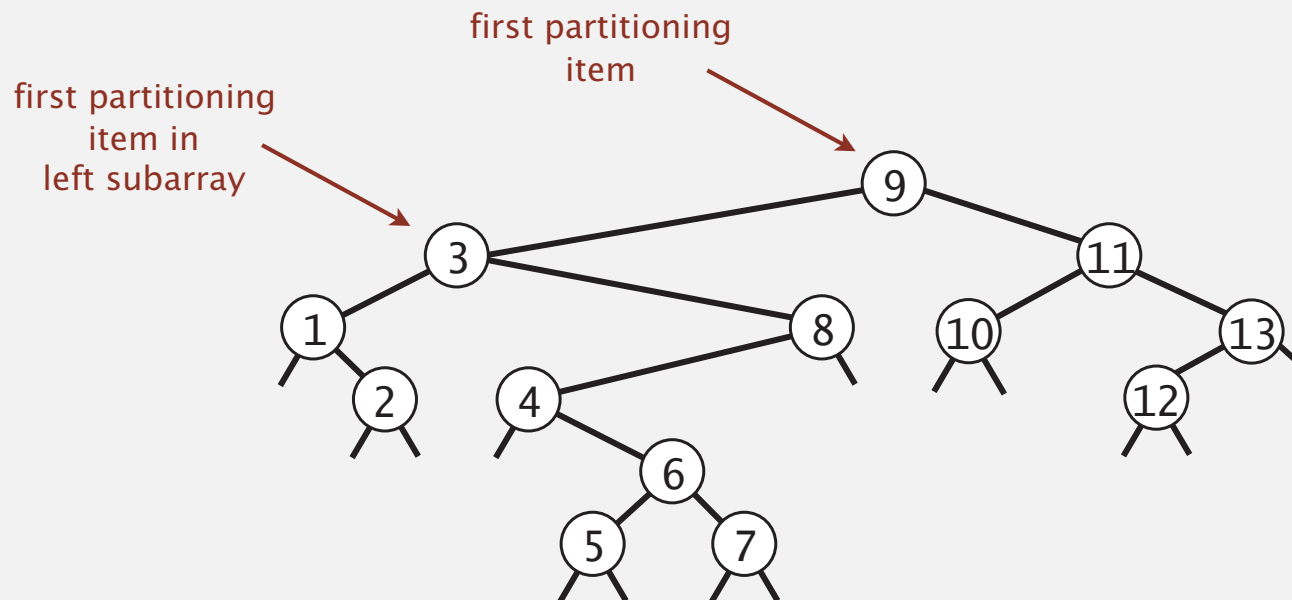


Quicksort: average-case analysis

Proposition. The average number of compares C_N to quicksort an array of N distinct keys is $\sim 2N \ln N$ (and the number of exchanges is $\sim \frac{1}{3} N \ln N$).

Pf 2. Consider BST representation of keys 1 to N .

- A key is compared only with its ancestors and descendants.
- Probability i and j are compared equals $2 / |j - i + 1|$.

- Expected number of compares = $\sum_{i=1}^N \sum_{j=i+1}^N \frac{2}{j - i + 1} = 2 \sum_{i=1}^N \sum_{j=2}^{N-i+1} \frac{1}{j}$

 $\leq 2N \sum_{j=1}^N \frac{1}{j}$
 $\sim 2N \int_{x=1}^N \frac{1}{x} dx$
 $= 2N \ln N$

Quicksort: summary of performance characteristics

Quicksort is a (Las Vegas) **randomized algorithm**.

- Guaranteed to be correct.
- Running time depends on random shuffle.

Average case. Expected number of compares is $\sim 1.39 N \lg N$.

- 39% more compares than mergesort.
- Faster than mergesort in practice because of less data movement.

Best case. Number of compares is $\sim N \lg N$.

Worst case. Number of compares is $\sim \frac{1}{2} N^2$.

[but more likely that lightning bolt strikes computer during execution]



Quicksort properties

Proposition. Quicksort is an **in-place** sorting algorithm.

Pf.

- Partitioning: constant extra space.
- Depth of recursion: logarithmic extra space (with high probability).

can guarantee logarithmic depth by recurring on smaller subarray before larger subarray (requires using an explicit stack)

Proposition. Quicksort is **not stable**.

Pf. [by counterexample]

i	j	0	1	2	3
		B ₁	C ₁	C ₂	A ₁
1	3	B ₁	C ₁	C ₂	A ₁
1	3	B ₁	A ₁	C ₂	C ₁
0	1	A ₁	B ₁	C ₂	C ₁



<http://algs4.cs.princeton.edu>

2.3 QUICKSORT

- ▶ *quicksort*
- ▶ *selection*
- ▶ *duplicate keys*
- ▶ *system sorts*

Duplicate keys

Often, purpose of sort is to bring items with equal keys together.

- Sort population by age.
- Remove duplicates from mailing list.
- Sort job applicants by college attended.

Typical characteristics of such applications.

- Huge array.
- Small number of key values.

```
Chicago 09:25:52
Chicago 09:03:13
Chicago 09:21:05
Chicago 09:19:46
Chicago 09:19:32
Chicago 09:00:00
Chicago 09:35:21
Chicago 09:00:59
Houston 09:01:10
Houston 09:00:13
Phoenix 09:37:44
Phoenix 09:00:03
Phoenix 09:14:25
Seattle 09:10:25
Seattle 09:36:14
Seattle 09:22:43
Seattle 09:10:11
Seattle 09:22:54
```

↑
key

Duplicate keys

Quicksort with duplicate keys. Algorithm can go quadratic unless partitioning stops on equal keys!

S T O P O N E Q U A L K E Y S

↑ swap

↑ if we don't stop on equal keys

↑ if we stop on equal keys

Caveat emptor. Some textbook (and commercial) implementations go quadratic when many duplicate keys.

What is the result of partitioning the following array?

A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

A.

A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

B.

A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

C.

A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Partitioning an array with all equal keys

		a[]															
i	j	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
		A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
1	15	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
1	15	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
2	14	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
2	14	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
3	13	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
3	13	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
4	12	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
4	12	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
5	11	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
5	11	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
6	10	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
6	10	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
7	9	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
7	9	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	8	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	8	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

Duplicate keys: the problem

Recommended. Stop scans on items equal to the partitioning item.

Consequence. $\sim N \lg N$ compares when all keys equal.

B A A B A **B** C C B C B

A A A A A **A** A A A A A

Mistake. Don't stop scans on items equal to the partitioning item.

Consequence. $\sim \frac{1}{2} N^2$ compares when all keys equal.

B A A B A B B **B** C C C

A A A A A A A A A A **A**

Desirable. Put all items equal to the partitioning item in place.

A A A **B B B B B** C C C

A A A A A A A A A A

Sorting summary

	inplace?	stable?	best	average	worst	remarks
selection	✓		$\frac{1}{2} N^2$	$\frac{1}{2} N^2$	$\frac{1}{2} N^2$	N exchanges
insertion	✓	✓	N	$\frac{1}{4} N^2$	$\frac{1}{2} N^2$	use for small N or partially ordered
shell	✓		$N \log_3 N$?	$c N^{3/2}$	tight code; subquadratic
merge		✓	$\frac{1}{2} N \lg N$	$N \lg N$	$N \lg N$	$N \log N$ guarantee; stable
timsort		✓	N	$N \lg N$	$N \lg N$	improves mergesort when preexisting order
quick	✓		$N \lg N$	$2 N \ln N$	$\frac{1}{2} N^2$	$N \log N$ probabilistic guarantee; fastest in practice
3-way quick	✓		N	$2 N \ln N$	$\frac{1}{2} N^2$	improves quicksort when duplicate keys
?	✓	✓	N	$N \lg N$	$N \lg N$	holy sorting grail

System sort in Java 7

`Arrays.sort()`.

- Has method for objects that are `Comparable`.
- Has overloaded method for each primitive type.
- Has overloaded method for use with a `Comparator`.
- Has overloaded methods for sorting subarrays.



Algorithms.

- Dual-pivot quicksort for primitive types.
- Timsort for reference types.

Q. Why use different algorithms for primitive and reference types?